

Visio25H²⁰T


The Visio25H from IMI Cornelius (formerly known as the SU-31 and SU-32) are versatile units with an easy 'plug and play' design making them ideal for promotions. Available with one or two taps, the Visio25H offers high performance with a compact-design and all-in-one self contained unit. Built using trusted technology and proven engineering expertise, its simple, affordable design provides:

- Excellent build quality and highly efficient operation
- Guaranteed cost-effective cooling performance
- Consistent in-glass temperatures
- Easy installation and serviceability

Key features include:

- Slim horizontal design
- Instantly ready for use
- Ideal for temporary and mobile outlets
- Easy to install and easy to use
- Small dimensions but high performance and capacity
- Branding and merchandising capability
- Can also dispense wine and other beverages



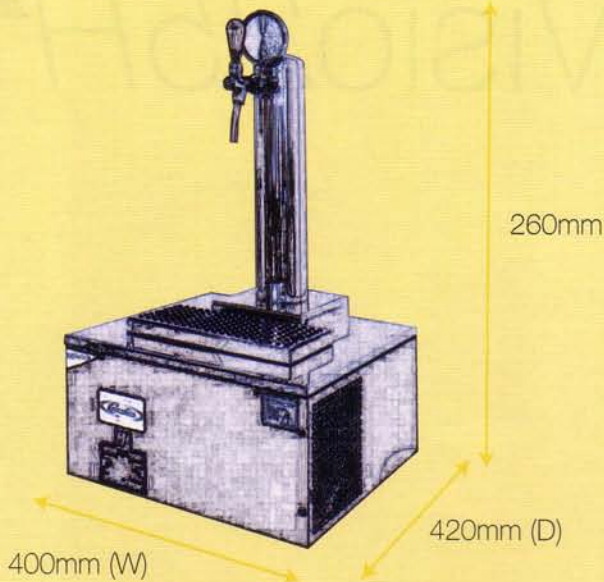

Performance:

Continuous product cooling per hour with a ΔT of:

10°C:	47 litres
20°C:	24 litres
30°C:	16 litres
Maximum ambient temperature:	32°C

Electrical:

Mains supply:	240v 50Hz
Run current:	2.1 amps
Start current:	6.3 amps
Maximum power consumption:	260 watts
Supply:	2m of mains cable

Refrigeration:

Compressor:	7.5cc
Compressor starting torque:	450 watts
Compressor duty:	380 watts
Evaporator type:	Aluminium block
Condenser type:	Steel fin
Expansion device:	capillary
Refrigeration type charge:	R134a 170g

Product coils:

Material:	Stainless Steel
Number of coils:	1 or 2
Diameter (internal/external):	7/8mm (5/16")

Fan Motor:

Output:	5 watts
Speed:	1350 rpm
Direction:	Anti-clockwise
Protection:	One shot fuse
Fan blade diameter:	172 mm
Pitch:	28°

Controls:

Control type:	Mechanical
---------------	------------

Compliance To Standards And Legislation

All coolers comply with Brewers Society Code of Practice for Electrical Safety in Beer Dispense in Licensed Premises. Designed to EN60335 part 1 (Safety of Household and Similar Electrical Appliances-General Requirements). Product coils are made from 304 stainless steel. Product complies with the current EMC Directive.

IMI Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact IMI Cornelius prior to placing your order.

